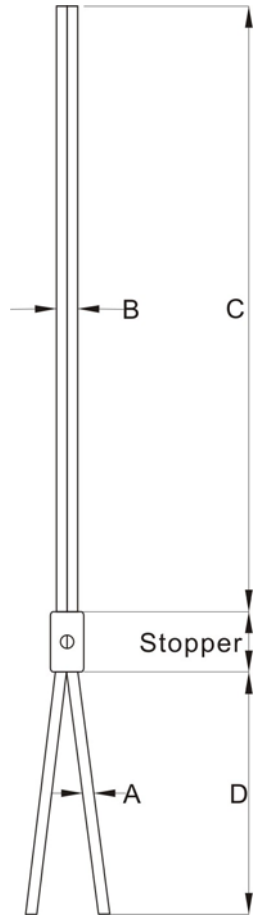






Wealthland (Audio) Limited

Shenzhen Kawasi Electronic Co., Ltd.

深圳市嘉和神电子有限公司

Customer / 客户		Part No / 零件号	35S-HS300-A32D34	Date / 日期	20-Jan-10
Specification / 规格书					
Model / 型号	HS310		Mylar speaker / 发音器		
 <p style="text-align: center; color: red;">Model no.: HS300</p>	Driver unit / 单元	Ø30mm NdFeB			
	Freq. response / 频率	20 ~ 20,000 Hz			
	Impedance / 阻抗	32Ω ± 10%			
	Sensitivity / 灵敏度	110dB ± 3dB S.P.L. at 1KHz			
	Rated power / 额定输入	10mw			
Comply with / 遵守	RoHS		Max input power / 最大输入	30mW	

Feature / 特性				Wire / 耳机线	Item/项目	(mm)	
Item	Desc. / 细则	Material / 材料	Color / 颜色		A (Ø)	1.4	
1	Cover / 耳盖	ABS	黑色		B ±0.2	2.8	
2	Tail / 耳机尾巴				C ±20	1600	
3	Case / 耳壳	ABS	黑色		D ±0.2	7	
4	Parts / 装饰件				E ±20	100	
5	Stopper / 线挡	PVC	黑色		F ±20		
6	Cord / 线	PVC	黑色		G ±20		
7	Plug / 插头	PVC	黑色		Hanger / 吊牌		
Pin(Ø) / 插针		3.5 (Silver)	Pin (Ø) / 插针		3.5 (Silver)	Colour / 颜色	
					Volume / 微调		
				Colour / 颜色			
Driver pin circuit / 单元电路		Mic pin circuit / 咪电路		Imp. / 阻抗			
				Mic / 电容咪	AO67R		
				Size / 尺寸	9.7x6.7mm		
				C. Cap / 电容	No		
				Directivity / 向性	Omni		
				Freq / 频率	20-20KHz		
				Imp / 阻抗	3V		
				Operation / 工作	2.2Kohm		
				Sensi. / 灵敏度	-34		